



Step 1 – Double Check Measurements & Check for Obstacles:

- Unpack your blind and fittings.
- Roughly place the end brackets on each end of the blind.
- Hold the blind up to the position you wish to install it, to ensure it fits in the desired location.
- Also, check for any potential obstructions such as handles – to try and avoid these when installing.

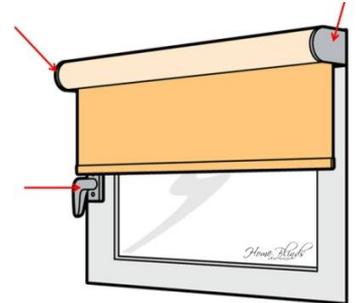

Step 2 – Installing the brackets:


- Identify the outer brackets marked LH for the left hand side & RH for the right hand side.
- Position each bracket so that it aligns with the top and side of the architrave; with the opening gate facing the front. Open the gate and screw into position, through the holes at the back of the bracket.
- Evenly space remaining support brackets and screw into position.



NOTE: Ensure that supporting brackets do not interfere with the cords supporting the slats of the blinds. You may need to adjust the position of the brackets to avoid these cables.

Step 3: Installing the blind:

- Ensure the LH & RH brackets have the gates in the open position.
- Insert the blind into the brackets.
- Close both gates. Ensure they are closed firmly and locked into position.

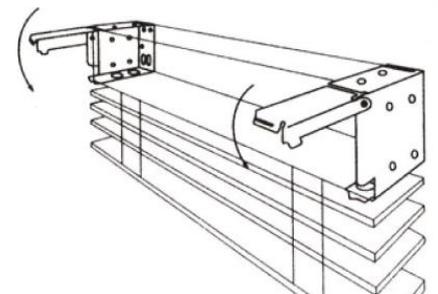

Step 5: Installing the valance:


- Lay the valance face down on a flat, smooth surface. (the groove in the back of the blind should be facing upward).
- Slide the mounting clips provided, into the groove ensuring all clips are facing the same direction (they can be stiff so may require gentle pressure and wiggling to get them on). The outside clips are to be 3cm from either end. All other clips to be spaced evenly between them.
- Slide the right angle brackets into the groove on either end & attach the side of the valance to the exposed end of the bracket.
- Position the valance in front of the headrail & hook the clips over the top of the head rail.



Please turn over →

Step 5 – Fit Child Safety Device

- Position the cleat on the architrave where you would like to have the excess cord wrapped when not in use, at least 1600mm from the floor level.
- Screw into the architrave with the screws provided.
- Wrap any unused cord on the cleat for child and pet safety.

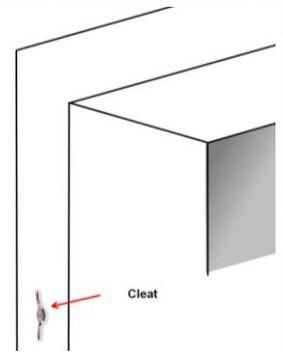

If you have any other queries, please don't hesitate to contact our customer service team at info@homeblindsaustralia.com.au or via the [Contact Us](#) page of our website.

WARNING:

To avoid creating a possible strangulation hazard for children, the corded internal window covering must be installed in such a way that loose cord or ball chain cannot form a loop 220mm or longer as measured along the perimeter of the cord. It should be secured at a height of more than 1600mm above floor level to ensure child safety.

A cord or ball chain guide may be installed lower than 1600mm above floor level, if the cord or ball chain is sufficiently secured or tensioned to prevent a loop of 220mm or longer being formed. If the cord or ball chain guide is installed lower than 1600mm above floor level, it must be installed so as to:

- prevent a child from being able to remove the cord or ball chain and;
- prevent a loop of 220mm or longer from being formed.